

KDMH-16S2C4 (16 Channel)

PRODUCT INFORMATION



Main Features


16Ch High end Real-Time Recording DVR

- ▶ Standard level MPEG-4 DVR
- ▶ Real-Time recording speed
- ▶ Pentaplex function
- ▶ Max. 2 SATA HDDs supported
- ▶ Audio 4 ch In & 1 ch Out
- ▶ 1 ch spot out
- ▶ Mouse control
- ▶ CMS

Specification

Spec. Details		KDMH-16S2C4 (16 channel)
Video Signal	Input	16 Channel Input (BNC) NTSC/PAL, 1V 75 Ohm
	Output	5 outputs (Composite BNC, VGA, S-Video, Spot, Loop through)
Compression		Enhanced MPEG-4, M-JPEG
Pentaplex Operation		Real-Time Watching, Recording, Playback, Networking, Backup (archiving)
Display	Display Resolution	NTSC - 704 x 480 / PAL-704 x 576
	Diaplay Speed	Real time display
	Display mode	1, 4, 6, 9, 13, 16 screen, PIP, Auto Screen
Recording & Playback	Recording Resolution	NTSC - 704 x 480, 704 x 240, 352 x 240 PAL - 704 x 576, 704 x 240, 352 x 288
	REC & PB Speed (NTSC / PAL)	CIF 480 ips / 400 ips HD1 240 ips / 200 ips D1 120 ips / 100 ips
	Recording mode	Continuous, Schedule, Event(Motion, Sensor, Network)
Search		Search by calendar, Search List, Event List, Time List

Backup	Internal HDD	3
	Internal Backup	1
	External Backup	USB
	Network Backup	TCP/IP(backup browser)
Serial Interface	Pan/Tilt, Zoom ,Preset	RS-485, RS-232
Alarm Control	Sensor Input	16 ports
	Relay out	4 ports
Audio	Audio input	4 channel
	Audio output	1 channel
Network	Interface	TCP / IP
	Protocol	Static, DHCP, PPPoE, DDNS
	Browser	Functional remote client software, Web Viewer(HTTP / IE), CMS
System control		Mouse, Remote Controller, Front keypad(6x6)
Language		Multi OSD
System upgrade		USB, Network
Others	Signal loss detection	Beep / Beep + OSD / OSD / OFF
	Motion detection	Yes / No
	Motion sensitivity	1 ~ 8 levels
	Mosaic	Yes / No
	Zoom	x 2
	Dimension	430(W) x 75(H) x 360(D)mm
	Weight	6.7 kg (without HDD)
	Power supply	DC 12V, 5.0A
	Approval	FCC, CE

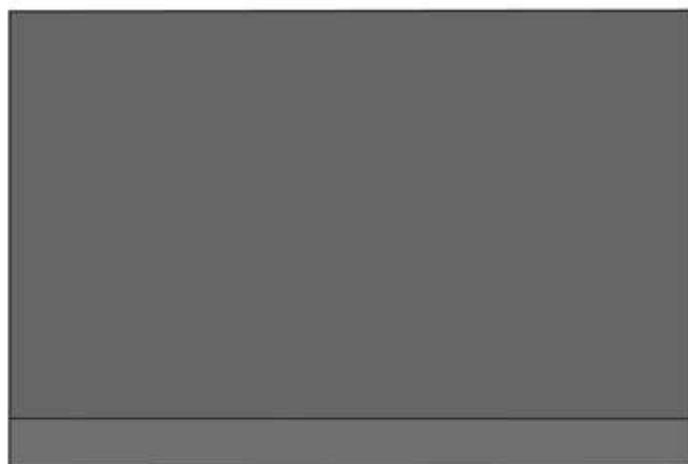

360mm



75mm

430mm